

-ČIŠĆENJE LAGERA-

Akcija važi dok traju zalihe.

Pneumatski odvijač

Na stanju –1 kom

Cena: 143,00 EUR + PDV.

LA439-EU 1/4" 
Heksagonalni prihvati
CCN: 01330133



- 13 Nm
- 0.25 kW
- 1,800 o/min
- Adjustable clutch
- Promena smeru jednom rukom

Pneumatski alati za završnu obradu | Polirke i Brusilice

Na stanju –1 kom

Cena: 79,00 EUR + PDV.

317A 75 mm (3") i 125 mm (5")
CCN:80090863



- 75 mm i 125 mm
- 0.35 kW (0.45 HP)
- 18,000 o/min
- Regulator snage

Ref.	CCN													
317A	80090863	125	–	7/16" – 20	0.35	18,000	1.05	104	1/4 NPT	10	5.7	11.80	86.7	3.3/0.8

Polirka

Na stanju – 4 kom

Cena: 110,00 EUR + PDV

311A 150 mm (6"), orbita 5 mm (3/16"), CCN:01365253



- 150 mm (6")
- Orbita: 5 mm (3/16")
- 10,000 o/min
- 0.19 kW
- Regulator snage

Ref.	CCN													
		mm	mm	mm	kW	o/min	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
311A	01365253	150	5.00	5/16" - 24	0.19	10,000	1.90	248	1/4 NPT	10	8.0	11.80	84.3	32.3/5.6

Makaze

Na stanju – 1 kom

Cena: 144,00 EUR + PDV.

7802SA Makaze
CCN:80113681



- Sečenje:
1.0 mm (20-gauge, 0.04")
- 4,200 udara u minuti

Ref.	CCN										
		udar/min	mm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
7802SA	80113681	4,200	–	1.3	239	1/4 NPT	10	1.9	10	83.0	3.0/1.0

Pneumatski odvijač

Na stanju – 1 KOM

Cena: 82,00 EUR + PDV.

327LS Bafer za
pneumatike
CCN: 01371699



- 0.38 kW
- 3,000 o/min
- Samo 0.50 kg
- Sistem za odvod vazduha

Ref.	CCN											
		in	kW	o/min	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
327LS	01371699	7/16" QC	0.38	3,000	0.50	-	1/4 NPT	10	6.6	6.6	77.4	2.5

Pneumatski udarni odvijač

Na stanju – 1 KOM

Cena: 155,00 EUR + PDV.

Ref.	CCN													
		in	Nm	Nm	o/min	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2102XPA	47520747001	3/8" □	75	75	14,500	3,650	0.70	175	1/4 NPT	10	4.7	-	84.8	3.0/1.0



Pneumatsko Brušenje& Završna obrada

G i M Serije Čeonih Brusilica

HHH

Super-duty Klasifikacija

Po 1 kom na stanju.

Cene su :

M2H200RG4 -48421572- 337,00 EUR + PDV

M2H250RG4 - 48393003- 337,00 EUR + PDV.



Tehničke Karakteristike na 6.2 bar (90 psi) dinamičkog pritiska na ulazu

Model No.	CPN	kW									
Čeone Brusilice											
M2H200RG4	48421572	0.75	20 000	6 mm+ 1/4"	0.77	213	3/8"	10	19.8	84.9	4.4 / 1.1
M2H250RG4	48393003		25 000	6 mm+ 1/4"	0.77	213	3/8"	10	19.8	88.2	< 2.5

Pneumatski udarni odvijači

Na stanju – 1 KOM

Cena: 410,00 EUR + PDV

2155QiMAX 1" ☐ Kratka osovina CCN:47123450



- 1,830 Nm maksimalnog momenta u odvrtanju
- Ergonomsko kućište je lako, štiti od hladnog vazduha i pruža veliki komfor korisniku.
- Mala težina će smanjiti umor
- 360° obrtanje ulaza pomaže da se crevo ne umotava.

Ref.	CCN													
2155QIMAX	47123450	1" ☐	1,830	1,220	6,300	1,150	3.36	225	3/8 NPT	13	4.0	15.10	96.3	8.7/2.7

Baterijska Bušilica 12V

Na stanju – 2 KOM

Cena 140,00 EUR + PDV

D1130EU-K2 Set

CCN: 47500116001

1/4" (6.5 mm) Bušilica, Punjač,
2xBL1203 (2.0 Ah) Li-Ion baterije



- 23 Nm maksimalnog momenta
- Čelikom ojačana kućišta daju jačinu i dodatnu otpornost na udarce i padanje
- Prekidač promenljive brzine obezbedjuje maksimalnu kontrolu

- FEIN -

- Na stanju – 1 KOM
- Cena: 310,00 EUR + PDV

GSZ 11-320 PRL

Straight grinder 32 500 / min

Handy and extremely powerful straight grinder with high immersion depth for heavy grinding and deburring work in hard-to-reach places. With FEIN ErgoGrip for fatigue-free work.

[More details](#)

Order number: 7 223 21 60 00 0

GENERAL TECHNICAL DATA

Nominal intake	1 010 W.
Power output	620 W
Idle speed	32,500 rpm
Grinding wheel max. Ø	45 mm
Collet max. Ø	8 mm
Collet Ø	43 mm
Milling cutter max. Ø	12 mm
Cable with plug	4 m
Weight according to EPTA	2.10 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	85 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	96 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	98 dB 3 dB
Vibration value 1 ahv 3-way Measurement uncertainty of the measured value Ka	9.7 m / s ² 1.5 m / s ²


scope of delivery

✓ 1 collet Ø 8 mm

✓ 1 open-end wrench
SW13

✓ 1 open-end wrench
SW17

- Na stanju – 1 KOM
- Cena: 225,00 EUR + PDV

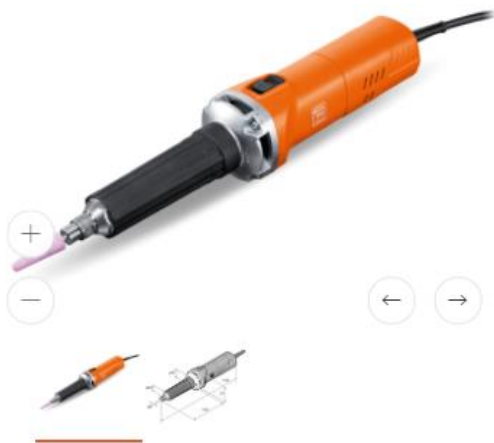

GSZ 8-280 PEL

Straight grinder 28,000 / min

Handy and powerful straight grinder with high immersion depth for grinding and deburring work in hard-to-reach places.

[More details](#)

Order number: 7 223 19 60 00 0

VARIANT SELECTION

GENERAL TECHNICAL DATA

Nominal intake	750 W
Power output	410 W
Idle speed	8,500 - 28,000 rpm
Grinding wheel max. Ø	50 mm
Collet max. Ø	8 mm
Collet Ø	43 mm
Milling cutter max. Ø	12 mm
Cable with plug	4 m
Weight according to EPTA	1.80 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	84 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	95 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	97 dB 3 dB
Vibration value 1 ahv 3-way Vibration value 2 ahv 3-way	5.3 m / s ² 11.4 m / s ²
Measurement uncertainty of the measured value Ka	1.5 m / s ²


scope of delivery

✓ 1 collet Ø 6 mm

✓ 1 open-end wrench
SW13

✓ 1 open-end wrench
SW17

- Na stanju – 1 KOM
- Cena alata i seta baterija (18V 2.5Ah – 2 BATERIJE I PUNJAČ) : 295,00 EUR + PDV

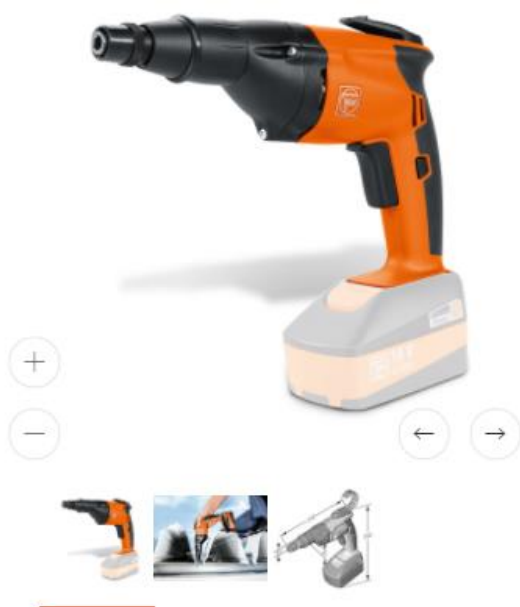

ASCS 6.3 SELECT

Cordless metal screwdriver up to 6.3 mm

Speed-optimized cordless drill for screw connections in metal up to screw diameter 6.3 mm.

[More details](#)

Order number: 7 113 11 63 00 0

Battery voltage	18 V	Sound pressure level LpA Measurement uncertainty of the measured value KpA	73 dB 3 dB
Battery compatibility	Li-Ion / HighPower Li-Ion	Sound power level LWA Measurement uncertainty of the measured value KWA	84 dB 3 dB
Battery interface	18 V	Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	92 dB 3 dB
Load speed	- 1,500 rpm	Vibration value 1 ahv 3-way Measurement uncertainty of the measured value Ka	1 m / s ² 1.5 m / s ²
Idle speed	- 1,700 rpm		
Max. Torque (hard / soft)	30/10 Nm		
Screws Ø	6.3 mm		
Quick change chuck	1/4 in		
Weight without battery	1.10 kg		

scope of delivery

- ✓ 1 scaffolding hook
- ✓ 1 depth stop
- ✓ 1 insert for hexagon head screws SW 8
- ✓ 1 plastic tool case

- Na stanju – 1 KOM
- Cena alata: 400,00 EUR + PDV

GWP 10

Taps up to M 10

Fast, precise tap with reversing gear for reduced working hours.

[More details](#)

Order number: 7 209 38 60 00 0



GENERAL TECHNICAL DATA

Nominal intake	450 W
Power output	250 W
Idle speed in counterclockwise rotation	- 1,000 rpm
Load speed when cutting	- 450 rpm
Load speed in counterclockwise rotation	- 680 rpm
Torque at max. Power output	21 Nm
Standstill torque	53 Nm
Thread in steel up to	M 10

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	82 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	93 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	96 dB 3 dB
Vibration value 1 dhv 3-way Measurement uncertainty of the measured value Ka	3.0 m / s ² 1.5 m / s ²

Stainless steel thread	M 10
Cone on the drilling shaft	B 12
Collet Ø	43 mm
Corner measure	23 mm
Cable with plug	5 m
Weight according to EPTA	1.60 kg

scope of delivery

- ✓ 1 additional handle
- ✓ Scope of delivery without threaded chuck

- Na stanju – 5 KOM
- Cena alata: 174,00 EUR + PDV

ALAT ZA GIPSARE



SCT 5-40 X

Drywall screwdriver up to 5 mm

The specialist for drywall and interior construction with silent coupling.

[More details](#)

Order number: 7 213 13 00 23 0

VARIANT SELECTION

SCT 5-40 X

GENERAL TECHNICAL DATA

Nominal intake	450 W
Power output	250 W
Load speed	- 2,700 rpm
Idle speed	- 4,000 rpm
Max. Torque (hard / soft)	12 / - Nm
Screws Ø	5 mm
Quick change chuck	1/4 in
Cable with plug	5 m
Weight according to EPTA	1.30 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	81 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	92 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	98 dB 3 dB
Vibration value 1 ohv 3-way Measurement uncertainty of the measured value Ka	0.8 m / s ² 1.5 m / s ²

scope of delivery

- ✓ 1 hand strap
- ✓ 1 belt clip
- ✓ 1 depth stop, protected from dust
- ✓ 1 magnetic holder for 1/4 "bits
- ✓ 1 bit 1/4 "for cross-head screws size 2 / Phillips (form H) with dust protection ring