

-ČIŠĆENJE LAGERA-

Akcija važi dok traju zalihe.

Pneumatski odvijač

Na stanju –1 kom

Cena: 143,00 EUR + PDV.



POLIRKA 311A - 01365253

Na stanju – 3 kom

Cena: 110,00 EUR + PDV

311A 150 mm (6"), orbita 5 mm (3/16"), CCN:01365253



- 150 mm (6")
- Orbita: 5 mm (3/16")
- 10,000 o/min
- 0.19 kW
- Regulator snage

Ref.	CCN													
311A	01365253	150	5.00	5/16" - 24	0.19	10,000	1.90	248	1/4 NPT	10	8.0	11.80	84.3	32.3/5.6

MAKAZE

Na stanju – 1 kom

Cena: 144,00 EUR + PDV.

7802SA Makaze
CCN:80113681



- Sečenje:
1.0 mm (20-gauge, 0.04")
- 4,200 udara u minuti

Ref.	CCN	udar/min	mm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s²/K ⁽¹⁾
7802SA	80113681	4,200	–	1.3	239	1/4 NPT	10	1.9	10	83.0	3.0/1.0

Pneumatski odvijač

Na stanju – 1 KOM

Cena: 82,00 EUR + PDV.

327LS Bafer za
pneumatike
CCN: 01371699



- 0.38 kW
- 3,000 o/min
- Samo 0.50 kg
- Sistem za odvod vazduha

Ref.	CCN	in	kW	o/min	kg	mm	in	mm	l/s	l/s	dB(A)	m/s²/K ⁽¹⁾
327LS	01371699	7/16" QC	0.38	3,000	0.50	-	1/4 NPT	10	6.6	6.6	77.4	2.5

Pneumatski udarni odvijač

Na stanju – 1 KOM

Cena: 155,00 EUR + PDV.

Ref.	CCN	in	Max. Nm	Nm	o/min	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2102XPA	47520747001	3/8" □	75	75	14,500	3,650	0.70	175	1/4 NPT	10	4.7	-	84.8	3.0/1.0



Pneumatsko Brušenje & Završna obrada

G i M Serije Čeonih Brusilica

HHH

Super-duty Klasifikacija

Cene su :

M2H200RG4 - 48421572- 337,00 EUR + PDV 1 kom na stanju

M2H250RG4 - 48393003- 337,00 EUR + PDV 1 kom na stanju



Tehničke Karakteristike na 6.2 bar (90 psi) dinamičkog pritiska na ulazu

Model No.	CPN	kW	rpm	mm	kg	mm	in (NPT)	mm	L/s	dB(A) ⁽¹⁾	m/s ² / K ⁽²⁾
Čeone Brusilice											
M2H200RG4	48421572	0.75	20 000	6 mm+ 1/4"	0.77	213	3/8"	10	19.8	84.9	4.4 / 1.1
M2H250RG4	48393003		25 000	6 mm+ 1/4"	0.77	213	3/8"	10	19.8	88.2	< 2.5

G1A200PP63 – 80155419 - 540,00 EUR + PDV 1 kom na stanju



G1A200PP63

Model Br.	CPN	kW	rpm	mm	mm	kg	mm	in (NPT)	mm	L/s	dB(A) ⁽¹⁾	m/s ² / K ⁽²⁾
Ugaone Brusilice												
G1A200PP63	80155419	0.30	20 000	75	3/8"-24	0.59	152	1/4"	8	11.8	79.9	16.8 / 6.2

Pneumatski udarni odvijači

Na stanju – 1 KOM

Cena: 410,00 EUR + PDV

2155QIMAX 1" □ Kratka osovina CCN:47123450



- 1,830 Nm maksimalnog momenta u odvrtnju
- Ergonomsko kućište je lako, štiti od hladnog vazduha i pruža veliki komfor korisniku.
- Mala težina će smanjiti umor
- 360° obrtanje ulaza pomaže da se crevo ne umotava.

Ref.	CCN	in	Nm	Nm	o/min	bpm	kg	mm	in	mm	l/s	l/s	dB(A)	m/s ² /K ⁽¹⁾
2155QIMAX	47123450	1" □	1,830	1,220	6,300	1,150	3.36	225	3/8 NPT	13	4.0	15.10	96.3	8.7/2.7

Pneumatski udarni odvijač ½" 2130XP - 80136112

Na stanju – 1 KOM

Cena: 135,00 EUR + PDV

2130XP 1/2" Tip prsten
CCN:80136112



- 816 Nm maksimalnog momenta
- Ergonomsko kućište je lako, štiti od hladnog vazduha i daje veliki komfor u radu
- Podešavanje snage u više položaja i lako menjane smeru jednom rukom

Ref.	CCN	in	Max Nm	Nm	1 min. o/min	1 min. bpm	kg	mm	in	mm	l/s	Max l/s	dB(A)	m/s/K ¹⁰
2130XP	80136112	1/2" <input type="checkbox"/>	816	474	9,500	1,200	1.90	187	1/4 NPT	10	2.1	10.40	94.3	8.9/2.0

POWER SOCKET

S64M17L-PS1 – 49,00 EUR+PDV – na stanju 3 kom

S64M27L-PS1 – 49,00 EUR+PDV – na stanju 2 kom

PowerSocket™
Obezbedjuje i do 50% više snage

Čak i kada se suočavate sa najstegnutijim vijkom ili korodiranim spojem, nije potreban veći alat ili poluga. Ingersoll Rand je proizveo PowerSockets™ koji obezbedjuje i do 50% više momenta za Vaš ½" udarni odvijač. Nastavak omogućuje da odvrnete vijak posle samo nekoliko udara izvršavajući posao brzo, lako i svaki put. Izgradjen po istim standardima kao naši profesionalni ključevi, Power Socket je napravljen da traje i radi snažno kao i Vi.




Kataloški broj	CCN	Veličina	Težina kg	D1 mm	D2 mm	T mm	L mm
6-PT PowerSocket™							
S64M17L-PS1	47539801001	17 mm	0.56	30.7	72.6	28.5	78
S64M27L-PS1	47539804001	27 mm	0.71	41.1	72.1	35.7	78

Baterijska Bušilica 12V - 47500116001

Na stanju – 1 KOM

Cena 140,00 EUR + PDV

D1130EU-K2 Set

CCN: 47500116001

1/4" (6.5 mm) Bušilica, Punjač,

2xBL1203 (2.0 Ah) Li-Ion baterije



- 23 Nm maksimalnog momenta
- Čelikom ojačana kućišta daju jačinu i dodatnu otpornost na udarce i padanje
- Prekidač promenljive brzine obezbedjuje maksimalnu kontrolu

RUČNA DIZALICA KX025-5 – 48485536

Na stanju – 1 KOM

Cena: 99,00 EUR + PDV



BATERIJSKA LED LAMPA L5110 - 48489561

Na stanju – 1 KOM

Cena: 59,00 EUR + PDV

L5110 Alat 20 V

CCN: 48489561



- Ultra svetlo LED sa 180 lumena
- Kompatibilna sa svim IQV20 baterijama
- Glava sa više pozicija, stojeći položaj ili visilica omogućuju da imate svetlo sa svih strana

- Vreme rada: 12.5 sati (BL2012); 15 sati (BL2022)

Pneumatski udarni odvijač 216B - 46806600

Na stanju – 1 KOM

Cena 170,00 EUR + PDV

216B 3/8" Tip prsten

CCN: 46806600



- 271 Nm maksimalnog momenta
- Samo 1.27 kg
- Ball & cam udarni odvijač
- Regulacija snage

- FEIN -

- Na stanju – 1 KOM
- Cena: 310,00 EUR + PDV


GSZ 11-320 PRL

Straight grinder 32 500 / min

Handy and extremely powerful straight grinder with high immersion depth for heavy grinding and deburring work in hard-to-reach places. With FEIN ErgoGrip for fatigue-free work.

[More details](#)

Order number: 7 223 21 60 00 0

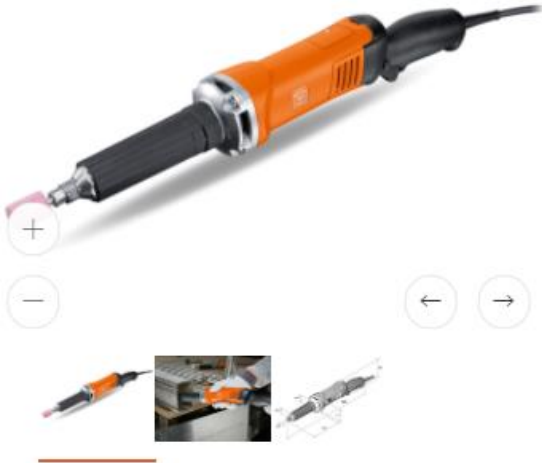

GENERAL TECHNICAL DATA

Nominal intake	1 010 W.
Power output	620 W
Idle speed	32,500 rpm
Grinding wheel max. Ø	45 mm
Collet max. Ø	8 mm
Collet Ø	43 mm
Milling cutter max. Ø	12 mm
Cable with plug	4 m
Weight according to EPTA	2.10 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	85 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	96 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	98 dB 3 dB
Vibration value 1 dhv 3-way Measurement uncertainty of the measured value Ka	9.7 m / s ² 1.5 m / s ²


scope of delivery

✓ 1 collet Ø 8 mm

✓ 1 open-end wrench
SW13

✓ 1 open-end wrench
SW17

- Na stanju – 1 KOM
- Cena: 225,00 EUR + PDV

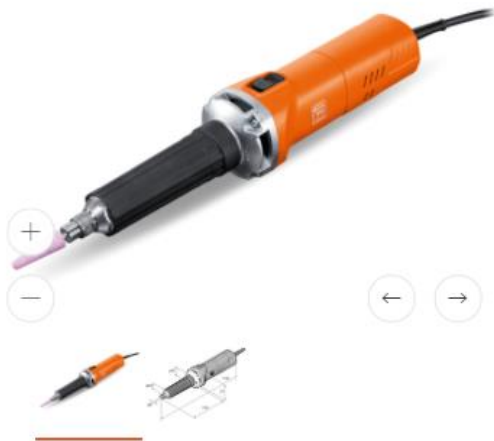

GSZ 8-280 PEL

Straight grinder 28,000 / min

Handy and powerful straight grinder with high immersion depth for grinding and deburring work in hard-to-reach places.

[More details](#)

Order number: 7 223 19 60 00 0

VARIANT SELECTION

GENERAL TECHNICAL DATA

Nominal intake	750 W
Power output	410 W
Idle speed	8,500 - 28,000 rpm
Grinding wheel max. Ø	50 mm
Collet max. Ø	8 mm
Collet Ø	43 mm
Milling cutter max. Ø	12 mm
Cable with plug	4 m
Weight according to EPTA	1.80 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	84 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	95 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	97 dB 3 dB
Vibration value 1 ahv 3-way Vibration value 2 ahv 3-way	5.3 m / s ² 11.4 m / s ²
Measurement uncertainty of the measured value Ka	1.5 m / s ²

scope of delivery

✓ 1 collet Ø 6 mm

✓ 1 open-end wrench
SW13

✓ 1 open-end wrench
SW17

- Na stanju – 1 KOM

- Cena alata i seta baterija (18V 2.5Ah – 2 BATERIJE I PUNJAČ) : 295,00 EUR + PDV



ASCS 6.3 SELECT

Cordless metal screwdriver up
to 6.3 mm

Speed-optimized cordless drill for
screw connections in metal up to
screw diameter 6.3 mm.

[More details](#)

Order number: 7 113 11 63 00 0

Battery voltage	18 V	Sound pressure level LpA Measurement uncertainty of the measured value KpA	73 dB 3 dB
Battery compatibility	Li-Ion / HighPower Li-Ion	Sound power level LWA Measurement uncertainty of the measured value KWA	84 dB 3 dB
Battery interface	18 V	Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	92 dB 3 dB
Load speed	- 1,500 rpm	Vibration value 1 ahv 3-way Measurement uncertainty of the measured value Ka	1 m / s ² 1.5 m / s ²
Idle speed	- 1,700 rpm		
Max. Torque (hard / soft)	30/10 Nm		
Screws Ø	6.3 mm		
Quick change chuck	1/4 in		
Weight without battery	1.10 kg		

scope of delivery

✓ 1 scaffolding hook

✓ 1 depth stop

✓ 1 insert for hexagon
head screws SW 8

✓ 1 plastic tool case

- Na stanju – 1 KOM
- Cena alata: 400,00 EUR + PDV

GWP 10

Taps up to M 10

Fast, precise tap with reversing gear for reduced working hours.

[More details](#)



Order number: 7 209 38 60 00 0

GENERAL TECHNICAL DATA

Nominal intake	450 W
Power output	250 W
Idle speed in counterclockwise rotation	- 1,000 rpm
Load speed when cutting	- 450 rpm
Load speed in counterclockwise rotation	- 680 rpm
Torque at max. Power output	21 Nm
Standstill torque	53 Nm
Thread in steel up to	M 10

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	82 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	93 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	96 dB 3 dB
Vibration value 1 dhv 3-way Measurement uncertainty of the measured value Ka	3.0 m / s ² 1.5 m / s ²

Stainless steel thread	M 10
Cone on the drilling shaft	B 12
Collet Ø	43 mm
Corner measure	23 mm
Cable with plug	5 m
Weight according to EPTA	1.60 kg

scope of delivery

✓ 1 additional handle

✓ Scope of delivery without threaded chuck

- Na stanju – 5 KOM
- Cena alata: 174,00 EUR + PDV

ALAT ZA GIPSARE

SCT 5-40 X



Drywall screwdriver up to 5 mm

The specialist for drywall and interior construction with silent coupling.

[More details](#)

Order number: 7 213 13 00 23 0

VARIANT SELECTION

SCT 5-40 X

GENERAL TECHNICAL DATA

Nominal intake	450 W
Power output	250 W
Load speed	- 2,700 rpm
Idle speed	- 4,000 rpm
Max. Torque (hard / soft)	12 / - Nm
Screws Ø	5 mm
Quick change chuck	1/4 in
Cable with plug	5 m
Weight according to EPTA	1.30 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	81 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	92 dB 3 dB
Sound peak value LpCpeak Measurement uncertainty of the measured value KpCpeak	98 dB 3 dB
Vibration value 1 dhv 3-way Measurement uncertainty of the measured value Ka	0.8 m / s ² 1.5 m / s ²

scope of delivery

- ✓ 1 hand strap
- ✓ 1 belt clip
- ✓ 1 depth stop, protected from dust
- ✓ 1 magnetic holder for 1/4" bits
- ✓ 1 bit 1/4" for cross-head screws size 2 / Phillips (form H) with dust protection ring

- Na stanju – 1 KOM
- Cena alata: 299,00 EUR + PDV

Brusilica 2000W, QuickIN, WSB 20-230



Technical specifications

GENERAL TECHNICAL DATA

Nominal intake	2,000 W
Power output	1 250 W.
Idle speed	6,600 rpm
Grinding wheel Ø	230 mm
Tool holder	QuickIN
Location hole Ø	22.23 mm
Elast. Sanding pad Ø	230 mm
Weight according to EPTA	5.90 kg

VIBRATION AND NOISE EMISSION VALUES

Sound pressure level LpA Measurement uncertainty of the measured value KpA	87 dB 3 dB
Sound power level LWA Measurement uncertainty of the measured value KWA	98 dB 3 dB
Sound peak value LpOpeak Measurement uncertainty of the measured value KpOpeak	103 dB 3 dB
Vibration value 1 ahv 3-way	ah, AG 6.0 m / s ²
Vibration value 2 ahv 3-way Measurement uncertainty of the measured value Ka	ah, SG 2.5 m / s ² 1.5 m / s ²

scope of delivery

- ✓ 1 protective cover
- ✓ 1 clamping unit for grinding and cutting discs
- ✓ 1 additional handle

Furnishing

- ✓ brake
- ✓ Soft start
- ✓ Restart protection
- ✓ Dead man's switch "AutoStop"
- ✓ FEIN high-performance motor